
SAFETY DEVICE FOR ELECTRICAL APPARATUS OR APPLIANCES

Gary S. Beideman Application No. 10/771,953 Docket No. LPI-232US

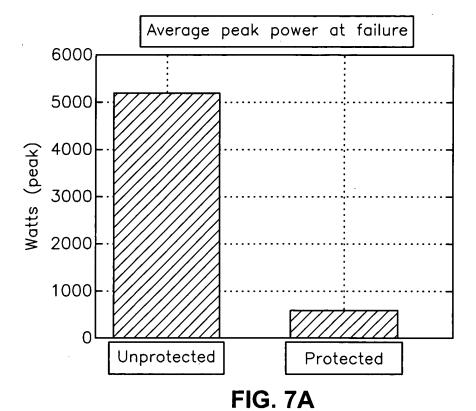

Average peak current at failure — motor unprotected and protected

45
40
35
30
30
25
10
Unprotected Protected

FIG. 7B